

## Measure Power

- Motor & Pump Loads
- Generator Output
- SCR Controlled Loads
- Electric Heating Elements
- Input to Instrumentation, PLC, or Datalogger
- Battery Load or Charging Current
- Energy Management Systems

## Monitor or Alarm

- Remote Indication of Electrical Loads
- Motor, Heater, Lighting On/Off Status
- Conveyor Jams
- Equipment Failures

### AC Current Transmitters P. 59-64



- ❑ 4-20 mA Output
- ❑ Standard or True RMS
- ❑ Split or Solid Core
- ❑ 0-2 Amp through 0-2000 Amp

- ❑ 4-20 mA Output
- ❑ 24V AC/DC Powered
- ❑ Split Core
- ❑ 0-50 Amp through 0-400 Amp

- ❑ Self-powered
- ❑ 0.2 Amp Solid State Switch
- ❑ Split Core
- ❑ Adjustable 1.5 to 150 Amp Setpoint

- ❑ 12 or 24 VDC Powered
- ❑ 0.2 A Solid State Switch or 0.5 A Relay
- ❑ Solid Core
- ❑ Adjustable 4 to 100 Amp Setpoint

- ❑ UL Recognized
- ❑ 1.05" ID to 2.5" ID
- ❑ Solid Core
- ❑ 50:5 to 1600:5 Ratios

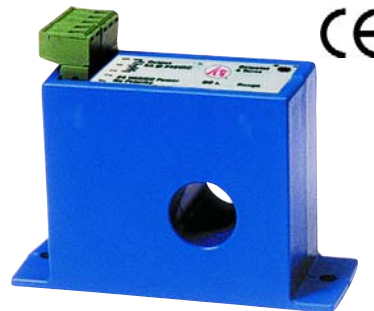

AC/DC Current