



Input: 0-100 mV to 0-10 VDC or 0-1 mA to 0-20 mA
Output: 0-1 V to ±10 VDC or 0-1 mA to 4-20 mA

- Add, Subtract, or Average up to 4 DC Inputs
- Input and Output LoopTracker® LEDs
- Functional Test Pushbutton
- 2000 VRMS Input/Output/Power Isolation
- Wide Bandwidth Option

Applications

- Add, Subtract, Average Flow Signals
- Calculate Average Temperatures

Specifications

Input Range

Factory Configured—Please specify input range

	Minimum	Maximum
Voltage:	0-100 mVDC	0-10 VDC to ±10 VDC
Current:	0-1 mA DC	0-20 mA DC including 4-20 mA

Popular ranges: 0-1 VDC, 0-5 VDC, 1-5 VDC, 0-10 VDC, ±5 VDC, ±10 VDC, 0-20 mA, 4-20 mA

System voltages must not exceed socket voltage rating
 Consult factory for special ranges or functions

Input Impedance

Voltage: 100 kΩ per volt nominal Current: 50 Ω nominal

Input Voltage Burden (Current)

1.0 VRMS maximum

Balance Between Inputs

Better than ±0.5% of span

LoopTracker

Variable brightness LEDs indicate input/output loop level and status

Output Range

Factory Configured—Please specify output range

	Minimum	Maximum	Load Factor
Voltage:	0-1 VDC	0-10 VDC	
Bipolar Voltage:	±1 VDC	±10 VDC	
Current (20 V compliance):	0-1 mA DC	0-20 mA DC	1000 Ω at 20 mA

Consult factory for special ranges

Output Zero and Span

Multiturn potentiometers to compensate for load and lead variations
 ±15% of span adjustment range typical

Functional Test Button

Sets output to test level when pressed. Adjustable 0-100% of span.
 Potentiometer factory set to approximately 50% of span

Response Time

100 milliseconds typical
 Optional 1 millisecond with DF option or consult factory

Output Linearity

Better than ±0.1% of span

Output Ripple and Noise

Less than 10 mVRMS

Isolation

2000 VRMS minimum
 Full isolation: power to input, power to output, input to output

Ambient Temperature Range and Stability

-10°C to +60°C operating ambient
 Better than ±0.02% of span per °C stability

Power

Standard: 115 VAC ±10%, 50/60 Hz, 2.5 W max.
P option: 80-265 VAC or 48-300 VDC, 50/60 Hz, 2.5 W typical
A230 option: 230 VAC ±10%, 50/60 Hz, 2.5 W max.
D option: 9-30 VDC, 2.5 W typical



Description and Features

The API 4400 G through API 4408 G accept up to four DC voltage or current inputs and provide an optically isolated DC voltage or current output that is proportional to the sum and/or difference of the inputs depending on the model.

The nine different models can accept a variety of additive and subtractive input combinations. A wide bandwidth 1 millisecond response model is available for high-speed applications. The A, B, C, and D inputs should be the same type, but mixing the ranges of the various inputs is possible. Consult the factory when selecting mixed input ranges.

The API 4400 G series uses no transformers or choppers in the signal path for best noise immunity and freedom from AC artifacts in the output. The inputs are not isolated from each other and use the same signal common connection. The modules do feature full 3-way (input, output, power supply) isolation.

API exclusive features include two **LoopTracker** LEDs and a **Functional Test Pushbutton**. The LoopTracker LEDs (Green for input, Red for output) vary in intensity with changes in the process input and output signals. Monitoring these LEDs can provide a quick visual picture of your process loop at all times. The functional test pushbutton provides a fixed output (independent of the input) when held depressed. Both the LoopTracker LEDs and functional test pushbutton greatly aid in saving time during initial startup and/or troubleshooting.

Industry standard sockets **API 011** and finger-safe **API 011 FS** allow either DIN rail or panel mounting, and are sold separately.

Models & Options

Factory Configured—Please specify input & output ranges, power and options

API 4400 G	(A + B + C + D) / 4	Isolated DC to DC math module, 115 VAC
API 4401 G	(A + B + C) / 3	Isolated DC to DC math module, 115 VAC
API 4402 G	(A + B) / 2	Isolated DC to DC math module, 115 VAC
API 4403 G	(A + B + C - D) / 3	Isolated DC to DC math module, 115 VAC
API 4404 G	(A + B - C - D) / 2	Isolated DC to DC math module, 115 VAC
API 4405 G	A - B - C - D	Isolated DC to DC math module, 115 VAC
API 4406 G	(A + B - C) / 2	Isolated DC to DC math module, 115 VAC
API 4407 G	A - B - C	Isolated DC to DC math module, 115 VAC
API 4408 G	A - B	Isolated DC to DC math module, 115 VAC

Options—Add to end of model number

P	Powered by 80-265 VAC or 48-300 VDC, 50/60 Hz
A230	230 VAC, 50/60 Hz
D	9-30 VDC
DF	Fast response time, 1 millisecond
U	Conformal coating for moisture resistance

Accessories—Order as a separate line item

API 011	11-pin socket
API 011 FS	11-pin finger safe socket
API TK36	DIN rail, 35 mm W x 39" L, aluminum



ELECTRICAL CONNECTIONS

WARNING! All wiring must be performed by qualified personnel only. This module requires an industry-standard 11-pin socket. Order API 011 or finger-safe API 011 FS socket separately.

Power Input Terminals – The white label on the side of the API module will indicate the power requirements. AC power is connected to terminals 1 and 3. For DC powered modules, polarity **MUST** be observed. Positive (+) is wired to terminal 1 and negative (-) is wired to terminal 3.

Signal Inputs – Terminals 4, 5, 6, 7, 8 provide the appropriate connections for the input signal. Polarity must be observed when connecting the signal input. The negative (-) connection for all inputs is connected to terminal 5.

The positive (+) connection for input A is to terminal 4.


The positive (+) connection for input B is to terminal 6.

The positive (+) connection for input C is to terminal 7.

The positive (+) connection for input D is to terminal 8.

Signal Output – Terminals 9 (+) and 10 (-) provide the connections for the output. Note that the output provides power to the output loop.

Signal Inputs

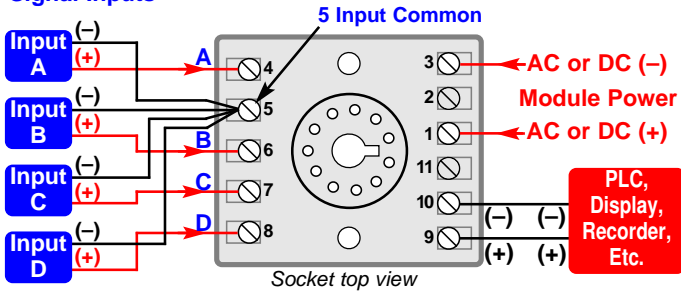

API 3400 G thru API 4400 G typical wiring

CALIBRATION

Input and output ranges are pre-configured at the factory as specified on your order. Top-mounted, Zero and Span potentiometers can be used should fine-tuning be necessary. Custom ranges may require factory modification. Calibration requires accurate signal generation and measurement equipment. Calibration should not be attempted unless such equipment is available.

1. Apply power to the module and allow a minimum 20 minute warm up time.
2. Using an accurate calibration source, provide an input to the module equal to the minimum input required for the application.

0% output will occur when all inputs (additive or subtractive) are at 0%. Any other calibration is non-standard.

Note that 0% and 100% refer to percent of span and not the absolute level. For example, in a 4-20 mA loop, 4 mA is considered 0% and 20 mA is considered 100%.

3. Using an accurate measurement device for the output, adjust the Zero potentiometer for the exact minimum output desired. The Zero control should only be adjusted when the input signal is at its minimum. This will produce the corresponding minimum output signal.

Example: for 4-20 mA output signal, the Zero control will provide adjustment for the 4 mA or low end of the signal.

4. Standard calibration for all models is such that 100% of the output level will occur when all additive inputs are at 100% and all subtractive inputs are at 0%.

Note that 0% and 100% refer to percent of span and not the absolute level. For example, in a 4-20 mA loop, 4 mA is considered 0% and 20 mA is considered 100%.

Set the input at maximum, and then adjust the Span pot for the exact maximum output desired. The Span control should only be adjusted when the input signal is at its maximum. This will produce the corresponding maximum output signal.

Example: for 4-20 mA output signal, the Span control will provide adjustment for the 20 mA or high end of the signal.

5. Repeat adjustments for maximum accuracy.

TEST BUTTON & TEST RANGE

The Test pushbutton may be set to provide the desired output when depressed. This will drive the device on the output side of the loop (a panel meter, chart recorder, etc.) with a known good signal that can be used as a system diagnostic aid during initial start-up or during troubleshooting. It can be adjusted to vary the output signal from 0 to 100% of the calibrated output range. When released, the output will return to normal.

Turn the multiturn Test Range potentiometer while holding the Test Switch depressed until the desired output test level is reached.

Example: If you are isolating a 4-20 mA current loop, when the pushbutton is held depressed, the output from the module will be a constant signal between 4 and 20 mA depending on the setting of the Test Range adjustment pot.

OPERATION

The API 4400 G series is factory configured to your exact input and output requirements. It can be configured to allow up to four inputs to be scaled and connected to either additive or subtractive amplifier inputs according to the model designation.

The input signal is filtered, and cancels any offset of the input relative to the output. 50 Ω shunts are used at the input for current-to-voltage conversion if required.

The resulting DC signal is passed through an optical coupler that carries the signal across an isolation barrier. The output stage is then configured to select the particular output range (voltage or current) as required.

The 4400 G series also includes a power supply which provides dual regulated and isolated supplies for circuit operation.

GREEN LoopTracker® Input LED – Provides a visual indication that a signal is being sensed by the input circuitry of the module. It also indicates the input signal strength by changing in intensity as the process changes from minimum to maximum to provide a quick visual picture of your process loop at all times. If the LED fails to illuminate, or fails to change in intensity as the process changes, this may indicate a problem with module power or signal input wiring. This feature greatly aid in saving time during initial start-up or troubleshooting.

RED LoopTracker output LED – Provides a visual indication that the output signal is functioning. It becomes brighter as the input and the corresponding output change from minimum to maximum. For current outputs, the RED LED will only light if the output loop current path is complete. For either current or voltage outputs, failure to illuminate or a failure to change in intensity as the process changes may indicate a problem with the module power or signal output wiring.

